

YTK-DSP T416B 13-25W 360° ABS PA Speaker



Feature:

- Fashion Design, Line Voltage 70/100V, Rated Power 25W
- Max SPL: 104±2dB
- Built-in 100v/70v transformer
- Wide Freq.Resp.:60Hz-20kHz
- High Sensitivity 90±2dB
- 4 speakers can be combined into a 360° dispersion speaker system fixed by a quadrangle bracket (optional)

Description:

The YTK-DSPT416 is a wall mounted speaker with a 70v/100v transformer built in. The 70v/100v transmission is realized in a high-voltage, low-current mode, which makes longer distance transmission and parallel connection of multiple loudspeakers possible.

This speaker is designed of wide frequency response (60-20,000Hz); it is made of high quality engineering plastic, with long-term durability, and will never be out of shape or fade; clear and sonorous sounds; 4 pcs of this speaker can be combined into a 360° dispersion speaker system fixed by a quadrangle bracket (optional)


It can be applied to different occasions vary in area sizes and background noises, such as station, park, school, square, military camp, industrial park, etc.

Specification


MODEL	DSPT416
Rated Power	25W
Line Voltage	70/100V
Max SPL(1M)	104±2dB
Sensitivity	90±2dB
Freq. Resp	60Hz-20kHz
Weight	3.2kg

Side View, Dimension Diagrams:

Hanging Hole



Nail for Mount

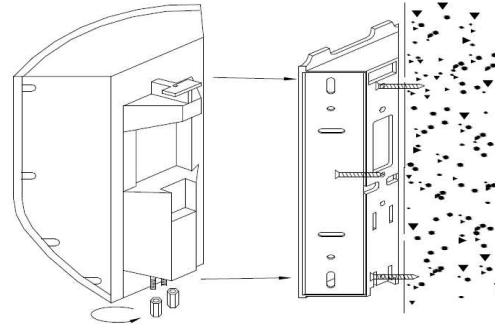

Installation

1. Screw off the screw caps at the bottom, remove the bracket from the speaker box and fix it on the wall; Combine the speaker box with the bracket and screw tight with screw caps;
2. Connect audio broadcasting wire to the terminals according to the table below;


	70V	100V
Red --- Blue	13W	25W
Red --- White	25W	N/A

3. Finally, adjust the direction of the speaker and examine whether it is steady.

Frequency & Impedance:

FREQ. RESPONSE

(dB SPL, 1W, 1m)

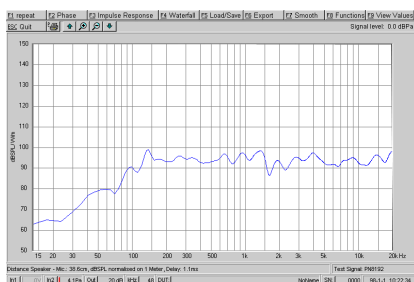

DISTORTION

(THD < 1.5% 1W, 1m, 100Hz~10kHz)

