

YTK C230 3M Projector Lift

(Close, normal setting)





Features

- 3m projector lift
- Supply RS232/RS485, Including: Manual and wireless remote control
- Function: Up, Down, stop
- Material: Iron of A3
- USA damping motor, Brake Function
- The left / right is 8 groups scissors x 2 , Two section of distance corrections for lift function (close , normal setting)
- The adjustable projector angle mount bracket (the left/right 0-30 $^{\circ}$; Up/Down 0-40 $^{\circ}$)
- Automatic setting of two section: stop
- Color: Phenolic plastics, Surface treatment: Bake of high temperature

Specification

- Motion max distance: 3000mm

- Weight: 20kg

- Load weight: 20kg

- Board size L x W (mm): 500 x 500


- Between true ceiling and false ceiling the height(mm): 650

- Power Supply: 220 V / 50 ~ 60 Hz

- Dimensions: 400(W) x 360 (D) x420(H) mm.



Drawing

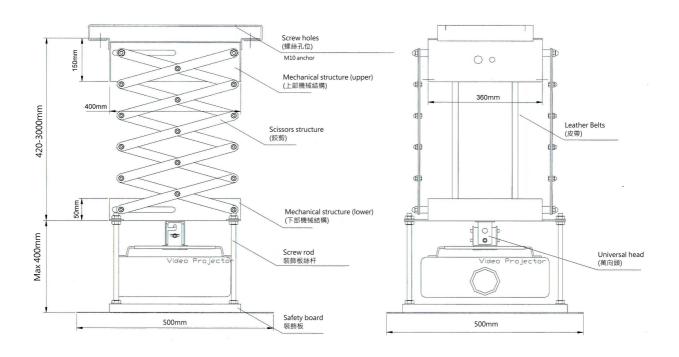

Suitable use:

Conference room, Hall, Lecture Theaters

Warranty: 12 Month

CB CE