

YTK CM210 1M Projector Lift

(Close, normal setting)




Features

- 1m projector lift
- Supply RS232/RS485, Including: Manual and wireless remote control
- Function: Up, Down, stop
- Material: Iron of A3
- USA damping motor , Brake Function
- The left / right is 4 groups scissors x 2 , Two section of distance corrections for lift function (close , normal setting)
- The adjustable projector angle mount bracket (the left/right 0-30 ° ; Up/Down 0-40 °)
- Automatic setting of two section: stop
- Color: Phenolic plastics , Surface treatment: Bake of high temperature
- Ceiling closure panel: yes

Specification

- Motion max distance: 920mm
- Weight: 10kg
- Load weight: 15kg
- Between true ceiling and false ceiling the height(mm): 320
- Power Supply: 220 V / 50 ~ 60 Hz
- Amperes: 1.2
- Board size L x W (mm): 400 x 400
- Dimensions: 350(W) x 300 (D) x165(H) mm.

Drawing

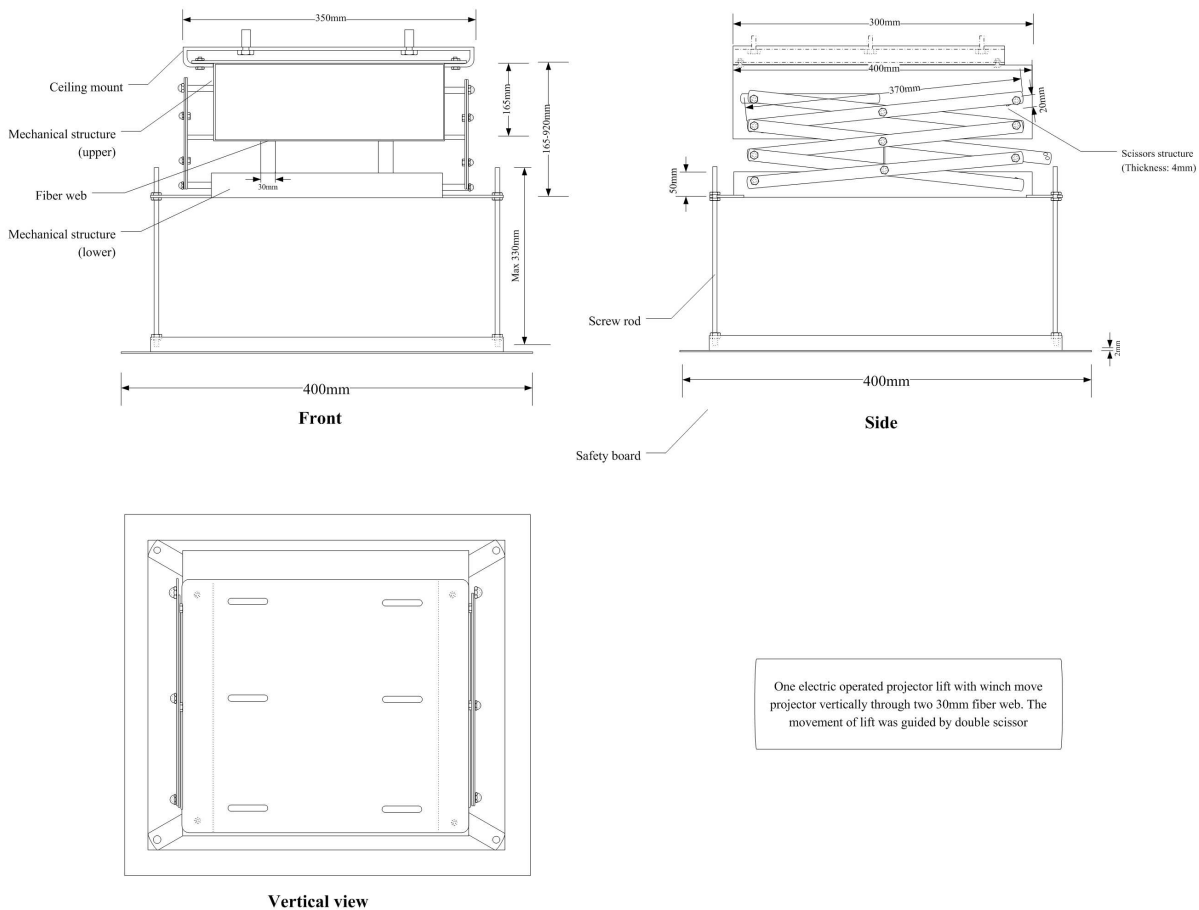

One electric operated projector lift with winch move projector vertically through two 30mm fiber web. The movement of lift was guided by double scissor

Built-in Wireless control:

- Control mode : RF wireless control
- Function: Up, Down, stop





Suitable use:

Conference room, Hall, Lecture Theaters

Warranty: 12 Month

CB CE