



Scissors Type Projector Lift Series

Projector Lift Series



The C/CM/CG series Projector Lift is the multimedia conference system best supplementary equipment, installs on the ceiling the elegant appearance.

This product use simplicity of operator, operation balanced reliable; The volume small noise is low, the design causes the product in the contour and the performance completely obviously the high intelligent science and technology.

- USA damping motor
- Power Require: 220V 50/60Hz
- Brake Function
- Manual control and RF control

Model	Load Weight(kg)	Motion distance (mm) (ft)	Board size L x W (mm) (A x B)	Projector Installment Cavity(mm) (C)	Dimensions L x W x H(mm)	Between true ceiling and false ceiling the height(mm)
C1010	10	115-900	500 x 500	330	430 x 385 x 115	320
CM210	15	165-920	400 x 400	330	350 x 300 x 165	320
CM215	15	215-1320			350 x 300 x 195	450
C210	20	205-1000			400 x 360 x 205	450
C215	20	265-1500	500 x 500	330	400 x 360 x 265	500
C220	20	320-2000			400 x 360 x 320	550
C225	20	370-2500			400 x 360 x 370	600
C230	20	420-3000			400 x 360 x 420	650
GC520	50	300-2000	600 x 600	430	460 x 420 x 300	600
GC530	50	400-3000			460 x 420 x 400	700
GC550	50	600-5000			460 x 420 x 600	900

May Tailor made

LRT-10A Rotating mount



Left / Right 350 degree-10Kg-



RF Series control




VM series hideaway type Projector lift

The VM1500/2000/3000 series hideaway type Projector lift is the proprietary product which we company develops newly, is the multimedia conference system Projector best supplementary equipment.

Inlays installs on the conference stage, installs on the ceiling the elegant appearance.

This product use simplicity of operator, operation balanced reliable; The volume small noise is low, double automatic valve (shutter when open may hide in lift table organism), the design causes the product in the contour and the performance completely obviously the high intelligent science and technology.

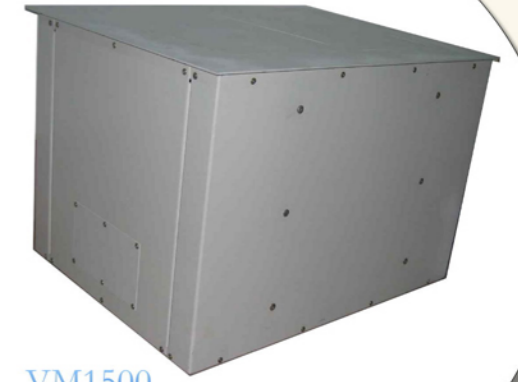

VM1500 /2000/3000 series

Table install: According to the projector lift table model, according to the floor opening size table's in size, in the floor phase should through hole and installment hole. Is careful the projecting camera lift table inlet, the lift table kneading board and the floor are even.

The projector lays aside directly on the projector lift table fluctuation kneading board. The projector power line, line and so on VGA line in by fluctuation kneading board on line hole introduction engine cases, draws out again by the engine case line hole, walks the line in the lift table, must tie up with machine the inside connection in the same place.

Ceiling install: According to projector model, according to hoisting ceiling opening size table in size, on decoration ceiling opening.

According to the attached list in the hoisting screw size, pulls with 4 x M10 explodes the screw the projector inlet, and the hoisting is fixed.

Projector immediate packing on projector lift table fluctuation surface rotary; Walks the line according to the paperback method, and observes whether to have clamps the line phenomenon.

Table opening size

Model	Table opening size W x L(mm)	The mounting dimensions W x L x D (mm)	Attention
VM1500	480 X 480	502 x 502 x 3	The Table opening direction should with the projector installment direction consistent .
VM2000	560 X 425	584 x 450 x 3	
VM3000	560 X 605	584 x 630 x 3	



Ceiling opening size

Model	Ceiling opening size W x L(mm)	The mounting dimensions W x L(mm)	Attention
VM1500	480 X 480	520 x 440	1.True ceiling and false ceiling should than the fuselage highly . 2. hoisting screw aperture highly for 4-φ11 .
VM2000	425 X 560	458 x 512	
VM3000	605 X 560	557 x 512	

Model	Box size W x L x H(mm)	Board size L x W x H(mm)	Manhole size W x L(mm)	Parameter
VM1500	474 x 472 x 380	500 x 500 x 3	366 x 354	Voltage: V=220V
VM2000	552 x 418 x 435	582 x 448 x 3	424 x 300	Power: N=20W
VM3000	552 x 597 x 435	582 x 628 x 3	424 x 480	Load: T=15kg

May Tailor made

Motion operation distance: 220mm / Or according to request manufacture

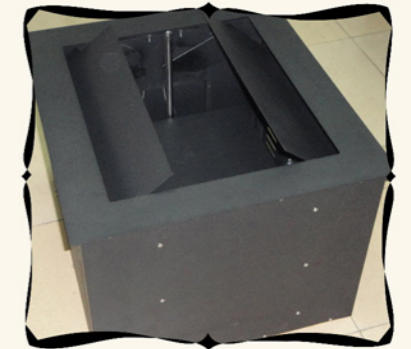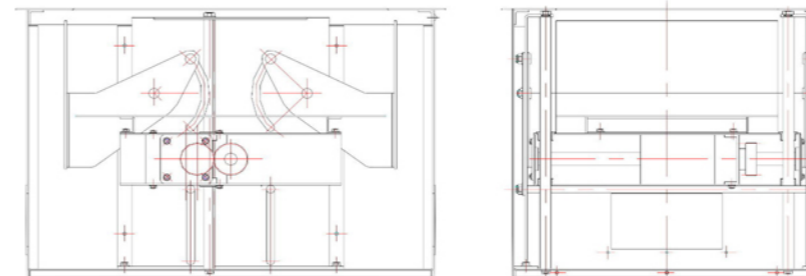

Agent: